




Screw Terminal Blocks

500/12 35

terminal block, 12 pole, insulating material: PA 6, cross-section rating: 2.5 mm², pin spacing: 10.0 mm, mounting hole diameter: 3.5 mm, fixing: screw, voltage rating: 450 V, current rating: 24 A

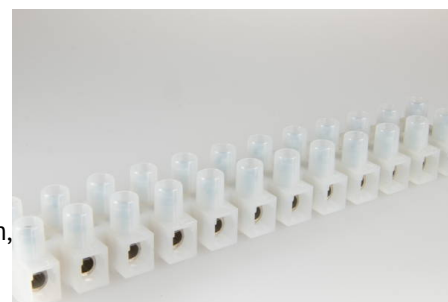

Order Info

reference number (ref. no.)	123212
PU	50
EAN	4028012100019

Type

type	terminal block
number of poles	12 pole
clamping units per pole	1
colour	natural
cross-section rating	2.5 mm ²

Technical Data

voltage rating	450 V
current rating	24 A
insulating material	PA 6
contact material	brass
core cross-section min.	0.5 mm ²
core cross-section max.	6.0 mm ²
flammability rating	V-2
max. Ambient Temperature Operation	85 °C
type of conductor solid	yes
type of conductor flexible	yes
type of conductor stranded	yes
stripping length	7.0-7.5 mm
Assembly Contact Screw	0.8x4.0 / ⌀ 0.5 Nm
mounting hole diameter	3.5 mm
pin spacing	10.0 mm
fixing	screw

Approvals

acc. to EN 60998

[Download PDF](#)

acc. to UL [Download PDF](#)

acc. to CSA [Download PDF](#)

Accessories

500 BZ/12 191312

ABK 405/12 193212

ZEL 110 196420
