




## Building Installation Connector System AC 166®

G

### Plug and Socket Connectors Tall Version

## AC 166 GBU/ 3 pastel blue

socket, 3 pole, pastel blue, coding: 5 (DALI), voltage rating: 250 V, current rating: 20 A, cross-section rating: 2.5 mm<sup>2</sup>

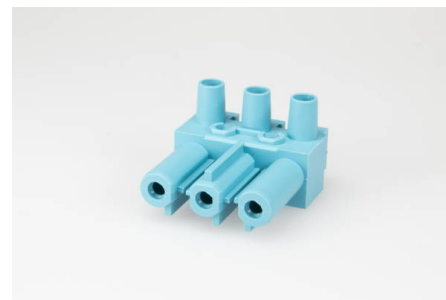

### Order Info

reference number (ref. no.)	165043
PU	200
EAN	4028012112708

### Type

type	socket
number of poles	3 pole
clamping units per pole	1
colour	pastel blue
coding	5 (DALI)
cross-section rating	2.5 mm <sup>2</sup>
protection against incorrect plugging	yes

### Technical Data

voltage rating	250 V
current rating	20 A
insulating material	PA 6.6
contact material	brass
core cross-section min.	0.5 mm <sup>2</sup>
core cross-section max.	4.0 mm <sup>2</sup>
impulse voltage rating	4.0 kV
flammability rating	V-2
max. Ambient Temperature Operation	70 °C
IP code	IP20
IP code when plugged	IP40
type of conductor solid	yes
type of conductor flexible	yes
type of conductor stranded	yes
stripping length	7.0 mm
Assembly Contact Screw	0.8x4.0 / ⚙ 0.5 Nm
mounting hole diameter	3.1 mm

<b>upper limit temperature</b>	100 °C
<b>fixing</b>	screw

## Approvals

<b>acc. to EN 61535</b>	<a href="#">Download PDF</a>
<b>acc. to UL</b>	<a href="#">Download PDF</a>
<b>acc. to CSA</b>	<a href="#">Download PDF</a>

## Accessories

<b>AC 166-1/ 3 ZEL F black</b>	166163
<b>AC 166-1/ 3 ZEL F white</b>	166153
<b>AC 166-1/ 3 ZEL FEO black</b>	166163EO
<b>AC 166-1/ 3 ZEL FO black</b>	166163O
<b>AC 166-1/ 3 ZEL FO white</b>	166153O
<b>AC 166-1/ 3 ZEL R black</b>	166063
<b>AC 166-1/ 3 ZEL R white</b>	166053
<b>AC 166-1/ 3 ZEL RO black</b>	166063O
<b>AC 166-1/ 3 ZEL RO white</b>	166053O
<b>AC 166-1/ 6 ZEL R black</b>	166066
<b>AC 166-1/ 6 ZEL R white</b>	166056
<b>AC 166-1/ 6 ZEL RO black</b>	166066O
<b>AC 166-1/ 6 ZEL RO white</b>	166056O