




Building Installation Connector System AC 166®
G
Plug and Socket Connectors Tall Version
AC 166-1/ 6 ZEL RH white

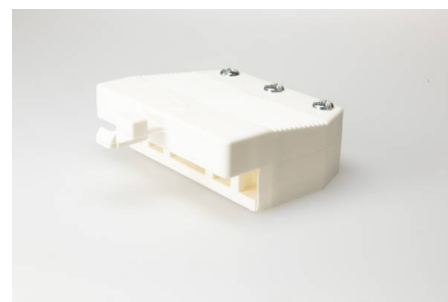

strain relief plug, 6 pole, white

Order Info

reference number (ref. no.)	166056H
PU	200
EAN	4028012111107

Type

type	strain relief plug
number of poles	6 pole
colour	white
strain relief type	RH

Technical Data

insulating material	PA 6.6
flammability rating	V-2
max. Ambient Temperature Operation	100 °C
dismantling length PE	bei 2x3-polig PE = 33 mm und bei 1x6-polig PE = 50 mm
dismantling length	bei 2x3-polig PE = 26 mm und bei 1x6-polig PE = 43 mm
strain relief assembly	PZ 1 / ⚙ 0.5 Nm
cable diameter min.	6.5 mm
cable diameter max.	8.3 mm
strain relief	yes