




## Building Installation Connector System AC 166®

G

Panel Mounting

### AC 166 GEST/ 3 white

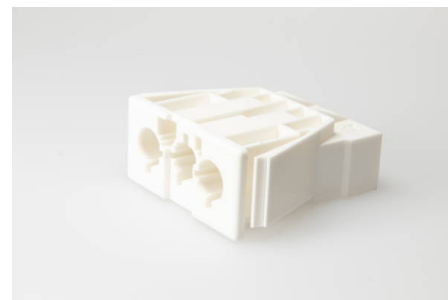

panel mount plug, 3 pole, white, coding: 1 (mains), wall thickness min.: 0.5 mm, wall thickness max.: 1.2 mm, voltage rating: 250 V, current rating: 20 A, cross-section rating: 2.5 mm<sup>2</sup>

#### Order Info

<b>reference number (ref. no.)</b>	168753
<b>PU</b>	200
<b>EAN</b>	4028012102877

#### Type

<b>type</b>	panel mount plug
<b>number of poles</b>	3 pole
<b>clamping units per pole</b>	2
<b>colour</b>	white
<b>coding</b>	1 (mains)
<b>cross-section rating</b>	2.5 mm <sup>2</sup>
<b>PE function</b>	yes
<b>protection against incorrect plugging</b>	yes

#### Technical Data

<b>voltage rating</b>	250 V
<b>current rating</b>	20 A
<b>insulating material</b>	PA 6.6
<b>contact material</b>	brass
<b>core cross-section min.</b>	0.5 mm <sup>2</sup>
<b>core cross-section max.</b>	2.5 mm <sup>2</sup>
<b>impulse voltage rating</b>	4.0 kV
<b>flammability rating</b>	V-2
<b>max. Ambient Temperature Operation</b>	70 °C
<b>IP code</b>	IP20
<b>IP code when plugged</b>	IP40
<b>type of conductor solid</b>	yes
<b>stripping length</b>	8.0-9.0 mm
<b>wall thickness min.</b>	0.5 mm
<b>wall thickness max.</b>	1.2 mm

<b>upper limit temperature</b>	100 °C
<b>fixing</b>	catch wing

## Approvals

<b>acc. to EN 61535</b>	<a href="#">Download PDF</a>
<b>acc. to UL</b>	<a href="#">Download PDF</a>
<b>acc. to CSA</b>	<a href="#">Download PDF</a>

## Accessories

<b>AC 166 VSE white</b>	169453
<b>AC 166 GVKS/ 3 ws</b>	169153