
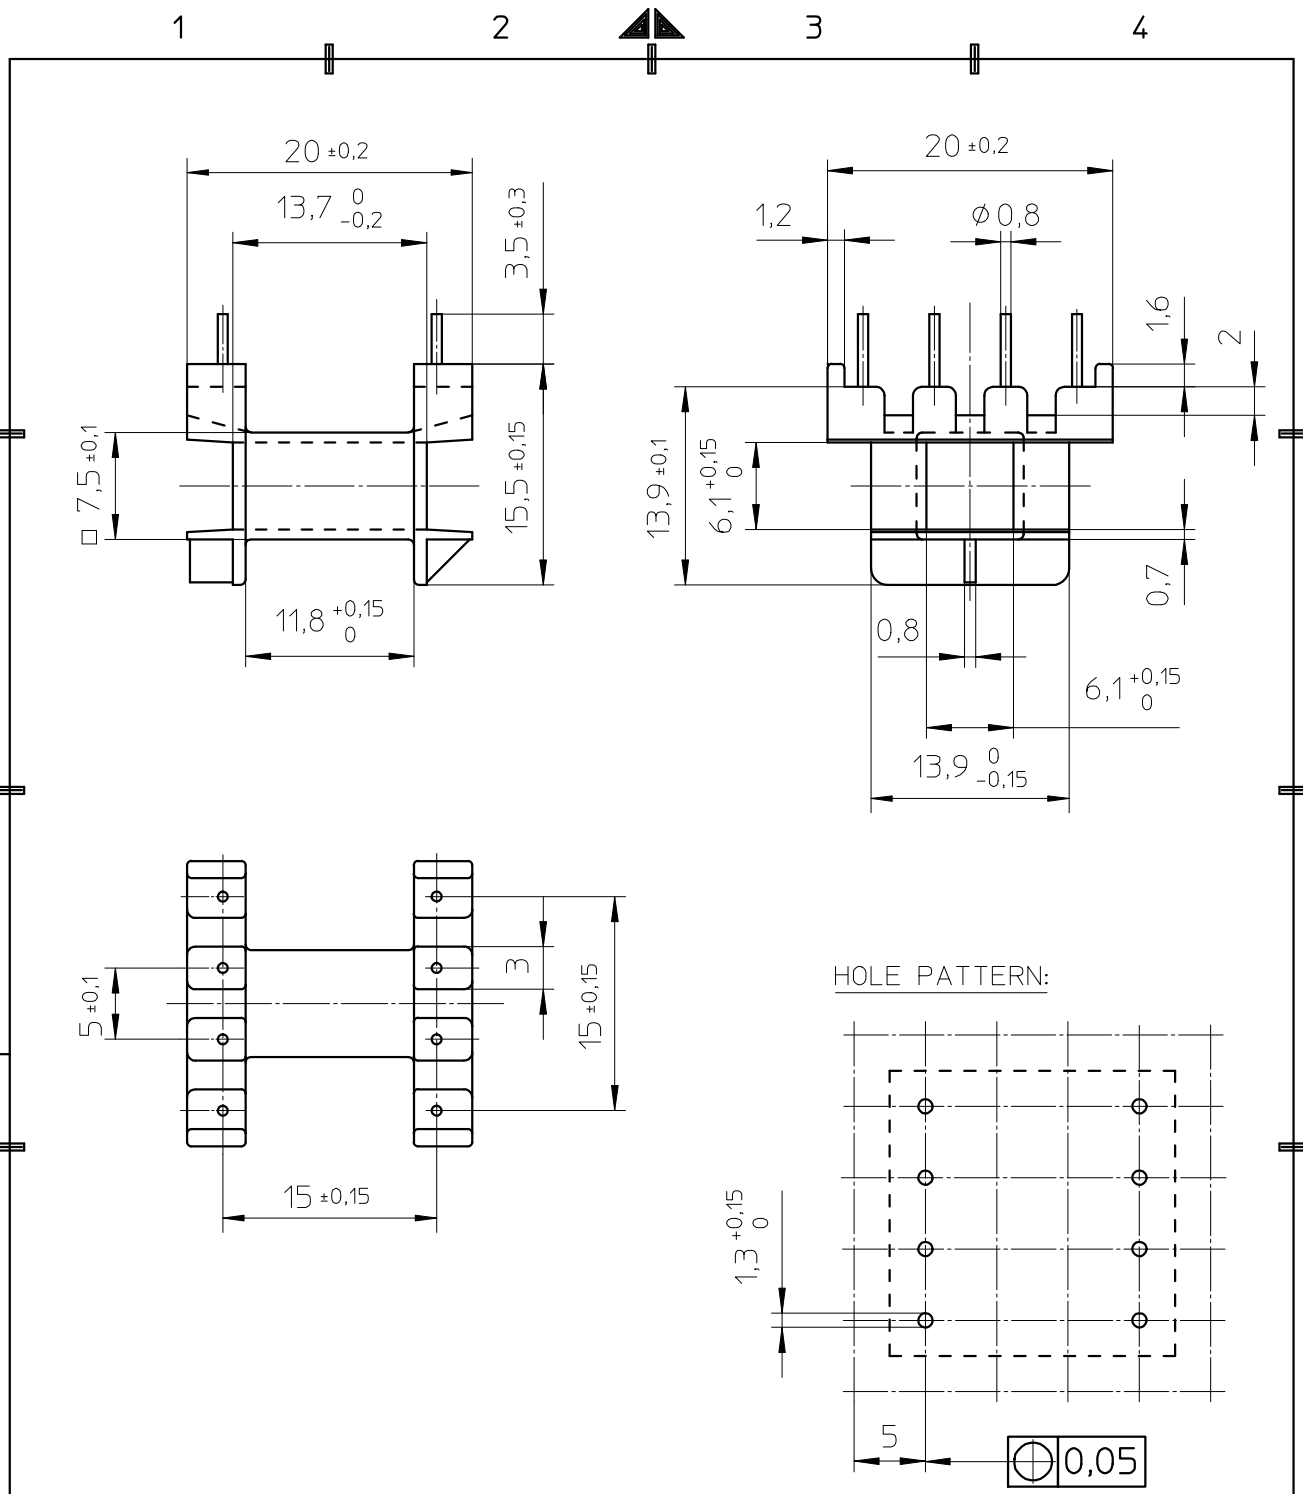



**FERROXCUBE**



Coil former material : Ultramide A3X2G5 (PA6.6), glass-reinforced.

UL file number: E41871 - UL94V-0.

Pin material : CuSn6 , Sn plated.

Max. operating temp. : 130°C class B.

Resistance to soldering heat : 350°C-2sec.

Solderability : IEC 60 068-2-20 Part 2, Test Ta, method 1.

Winding area : 34,8 mm<sup>2</sup>

Mean length of turn : 39 mm.

CLASS.NO.		CPH-E20/10/6-1S-8P		4312 021 26212		91-06-21	
						91-09-13	
						99-10-06	
						02-07-05	
						2004-09-28	
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL	112 - 001	010	A4
MPA	CHECK CONTR.	DAT.	91-06-21	Property of Eigendom van	© FERROXCUBE 2000		