

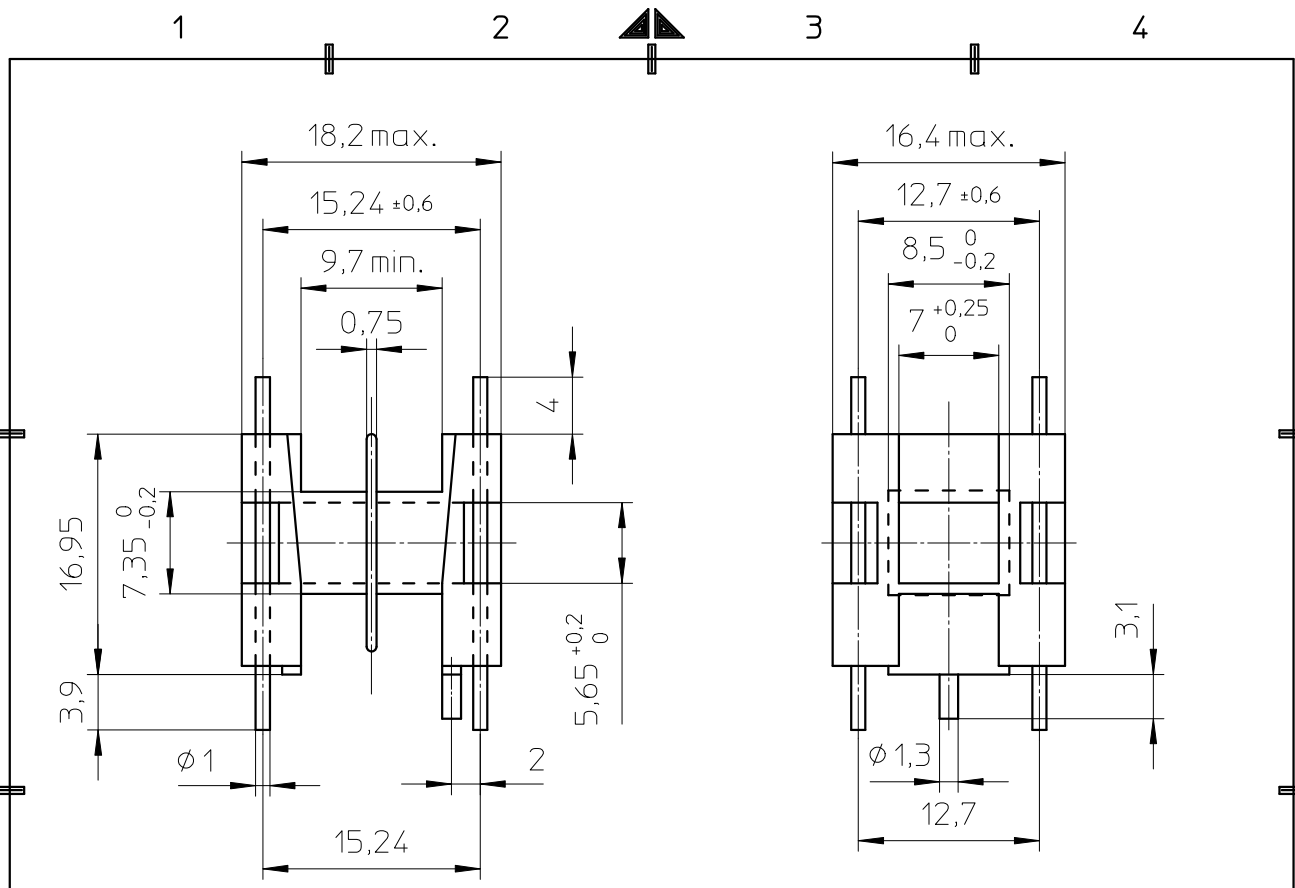



FERROXCUBE



HOLE PATTERN:

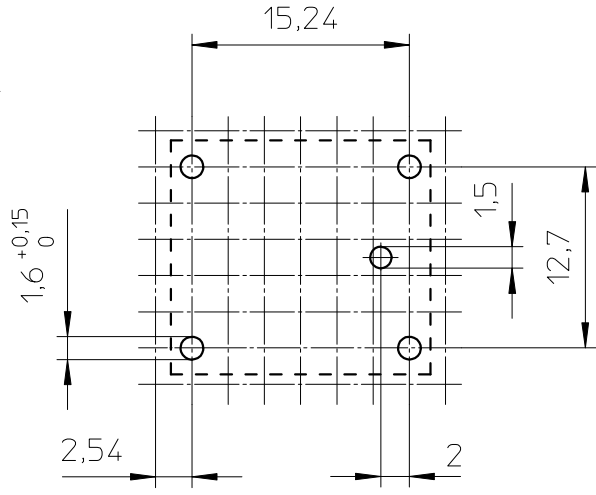

Coil former material: Rynite FR530 (PET), glass-reinforced.
 UL file number: E69578(M) - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 85 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3.5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 34,2 mm².
 Mean length of turn: 48,7 mm.

CLASS.NO.		CPH-U15/11/6-2S-4P	4322 021 01591		96-05-10	
96-08-29					96-06-24	
					96-08-29	
					2004-09-28	
					2006-06-28	
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SH BL.	112 - 001 010	A4
MPA	CHECK CONTR.	DAT.	95-12-07	Property of Eigendom van	© FERROXCUBE 2000	