



Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.  
 UL file number: E54705(M) - UL94V-0  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.  
 Min. winding area: 16 mm<sup>2</sup>.  
 Mean length of turn: 26 mm.

PROPOSED PAD ARRANGEMENT:

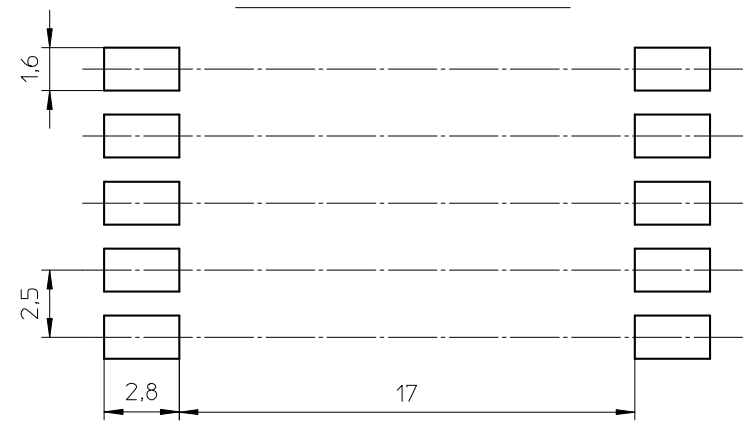

CLASSNO.		CPHS-EFD15-1S-10P		4322 021 0292		1 1998-07-22	
						1 2004-04-01	
						1 2005-03-08	
						1 2006-07-31	
						1 2012-07-10	
NAME	M.Tryngiel	SUPERS.	8222 294 46351	001	SP/SH	112 - 001	069
VERV.		DAT.	98-07-22		BL/BL		
MPA	CHECK CONTR.	Property of Eigenaam van		© FERROXCUBE 2000		A3	