



FERROXCUBE




c






d



e




f

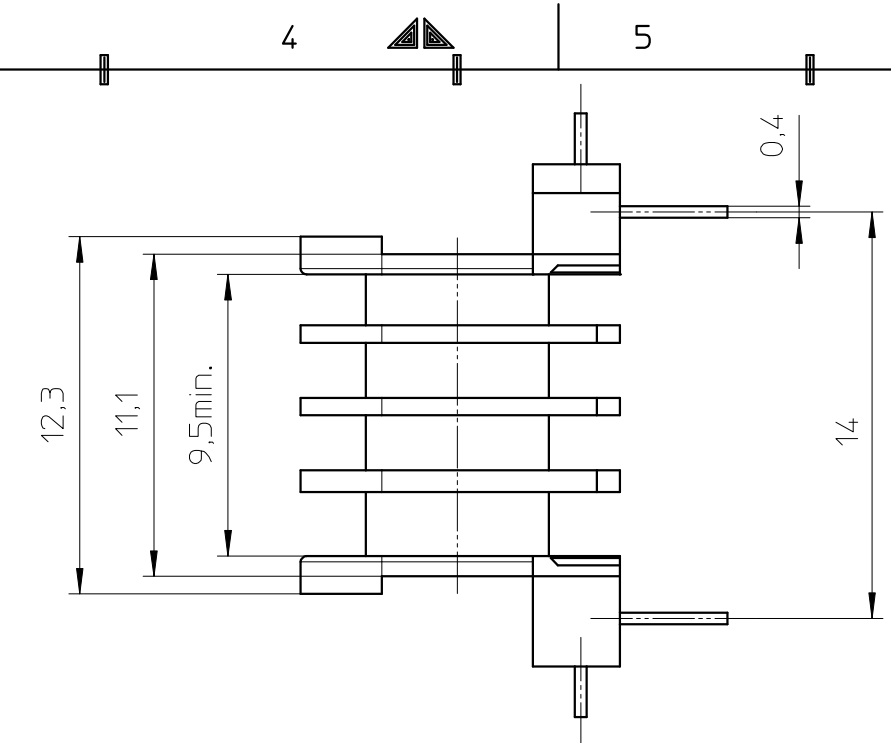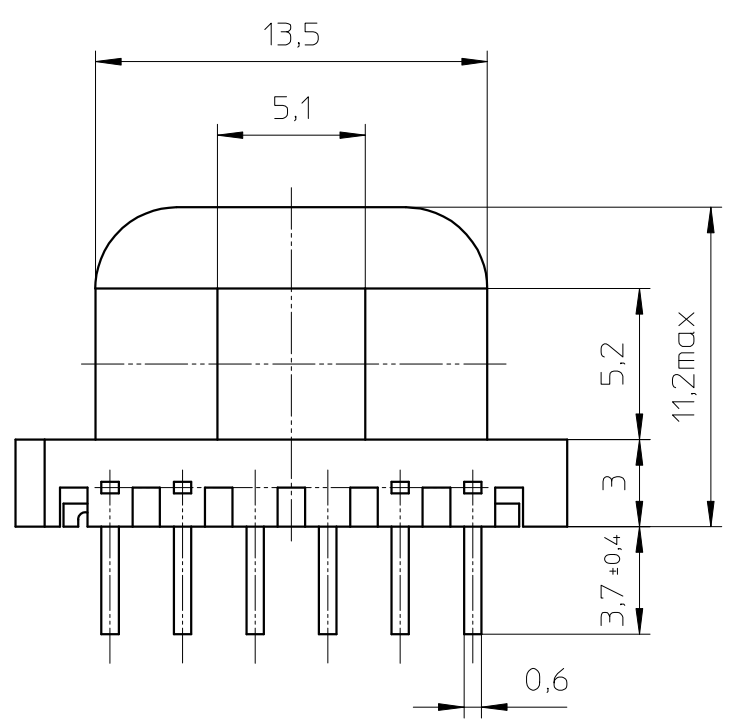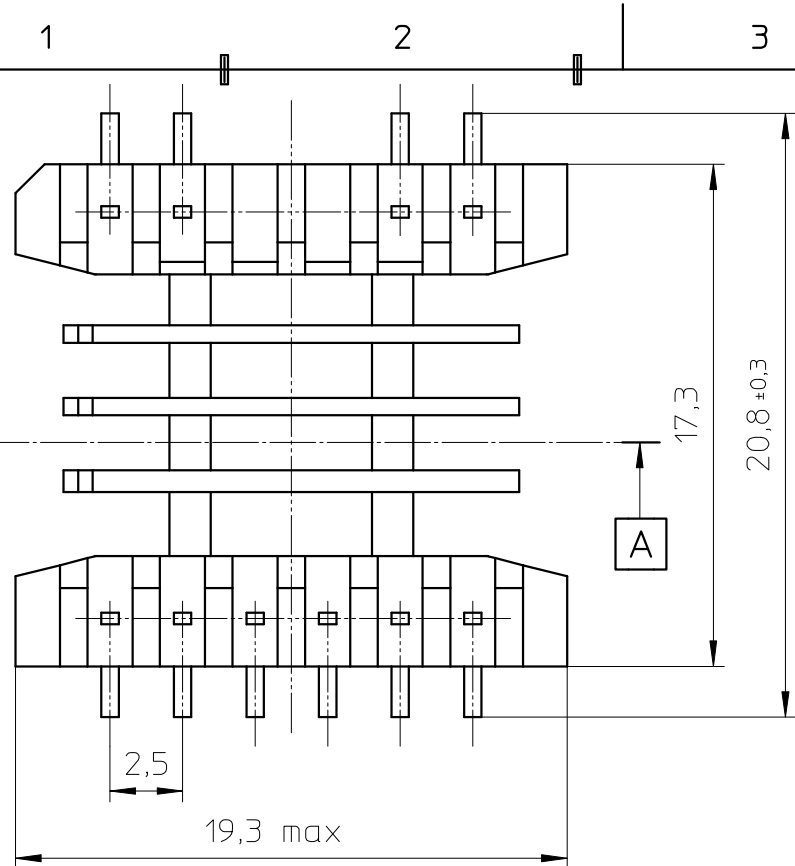


A-A

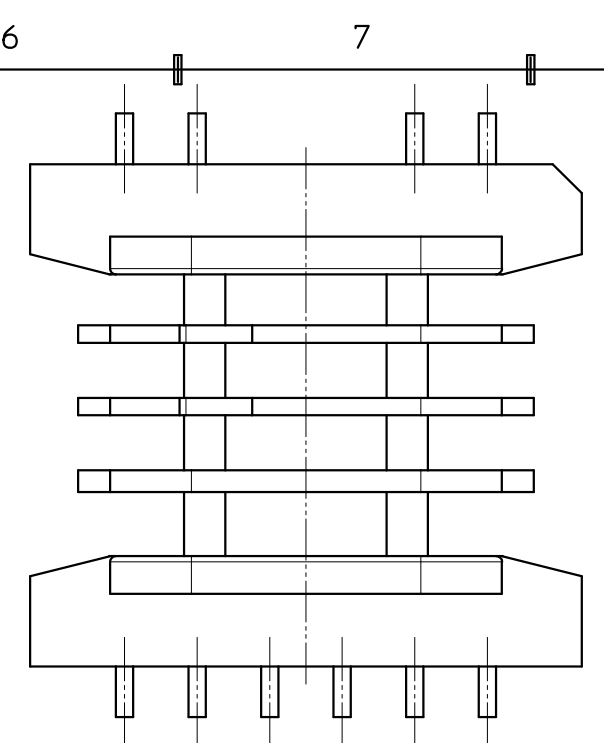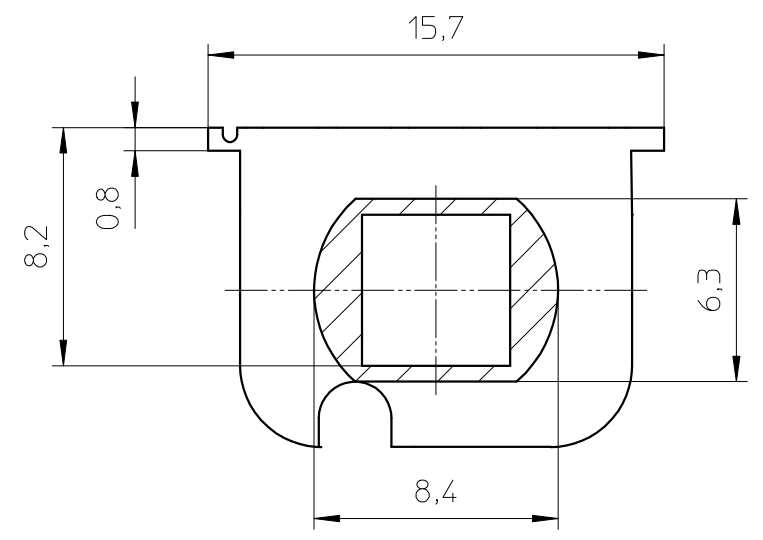

PROPOSED HOLE PATTERN:

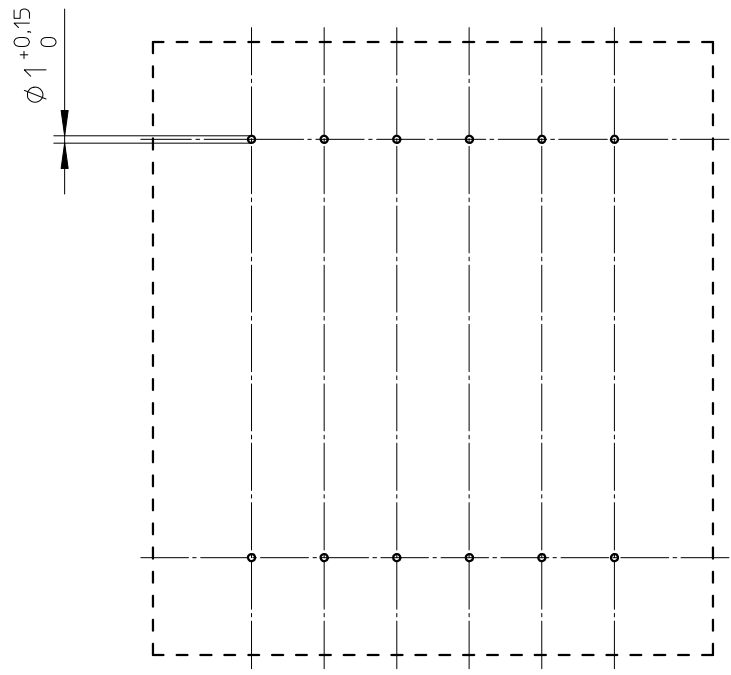

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705(M) - UL94V-0
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s



CLASS.NO.	CPH-E19/8/5-4S-10P		4322 021 04131	2002-04-16 2005-03-11
NAME NAAM	M.Veekens	SUPERS. VERY.	1 SH SH BL BL	112 - 001
MPA	CHECK CONTR.	DAT.	Property of Eigendom van	© FERROXCUBE 2000
		2002-04-16		A3