

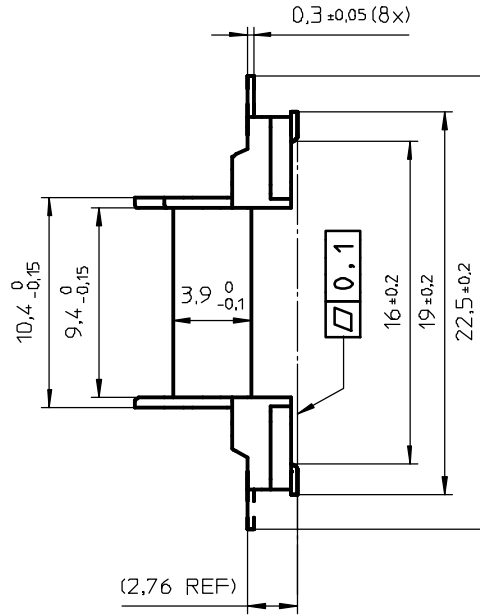
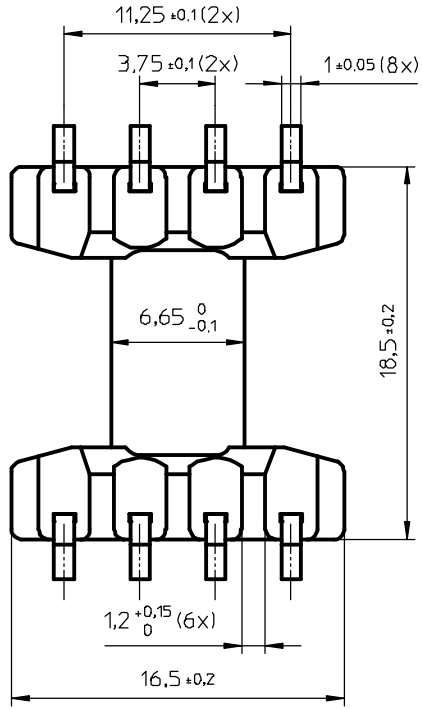



**FERROXCUBE**

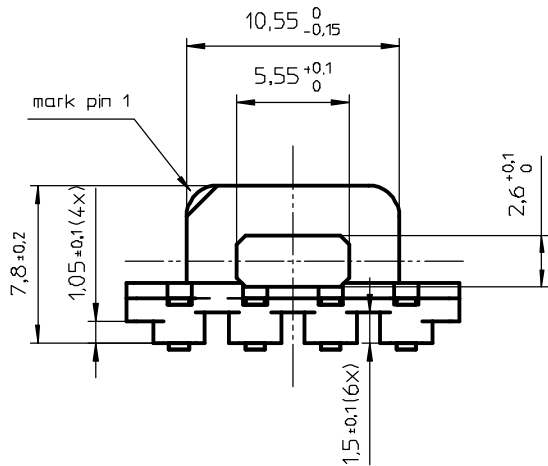

PROPOSED PAD ARRANGEMENT:

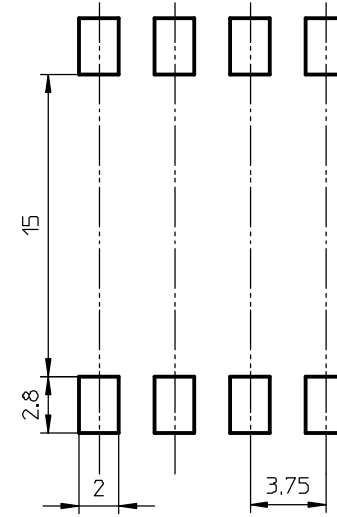

- Coil former material: Sumikan PM-9630 (PF), glass-reinforced, UL file number E41429 - UL94V-0.
- Pin material: CuSn, Sn plated.
- Max. operating temp.: acc. to IEC 60085 class H, 180°C
- Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5 s.
- Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
- Min. winding area: 16,7 mm<sup>2</sup>
- Mean length of turn: 24,1 mm.



CLASS NO.		CSHS-EFD15-1S-8P-Z		4322 021 06071		03-02-20	
NAME	J. JON	SUPERS	001	SP	112 - 001	069	A3
MPA	CHECK	DATE	03-02-20	Property of	© FERROXCUBE 2000		