
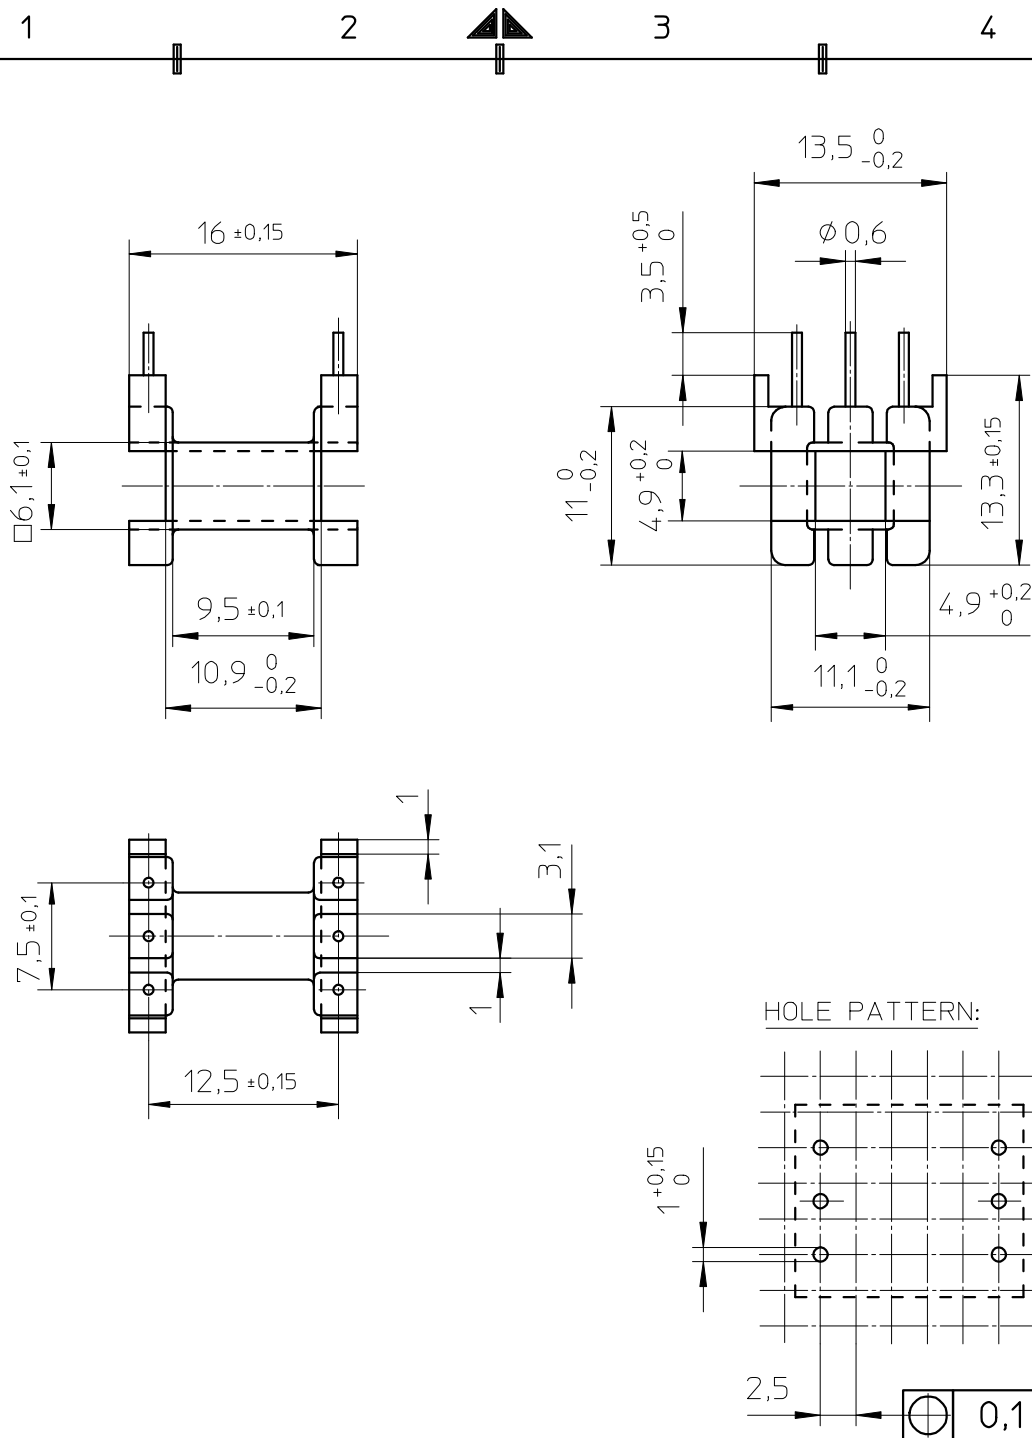



FERROXCUBE



Coil former material: Ultramide A3X2G5 (PA6.6), glass-reinforced.
 UL file number: E41871(M) - UL94V-0.
 Pin material: CuSn, Sn plated.
 Max. operating temp.: acc. to IEC 85 class B, 130°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 21,6 mm².
 Mean length of turn: 33 mm.

CLASS.NO.		CPH-E16/8/5-1S-6P-Z		4322 021 06271		03-03-10	
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL.	112	-	001 010
MPA	CHECK CONTR.	DAT.	03-03-10	Property of Eigendom van		© FERROXCUBE 2000	
						A4	