


HOLE PATTERN:  
Space requirement 7x7 pitch.

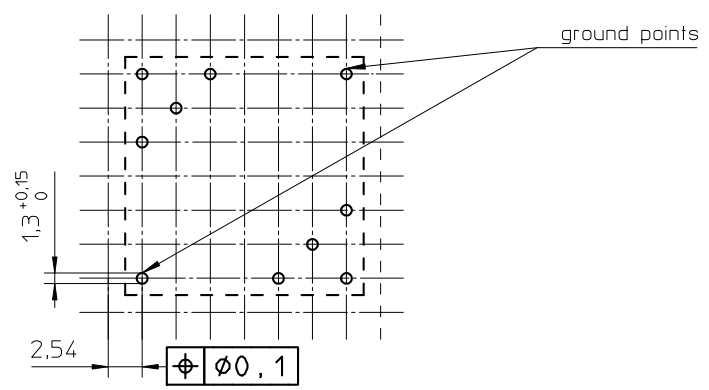

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
UL file number: E41429 - UL94V-0.

Pin material: Copperclad steel, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class H, 180°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area: 19.6 mm<sup>2</sup>.

Mean length of turn: 35 mm.

CLASSNO.				2007-10-01	
		CSV-RM7-2S-8P-TZ		4322 021 06761	
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SPRSH BL BL	112 - 001 010
MPA	CHECK CONTR.	DAT.	07-10-01	Property of Eigendom van	© FERROXCUBE 2002
					A3