
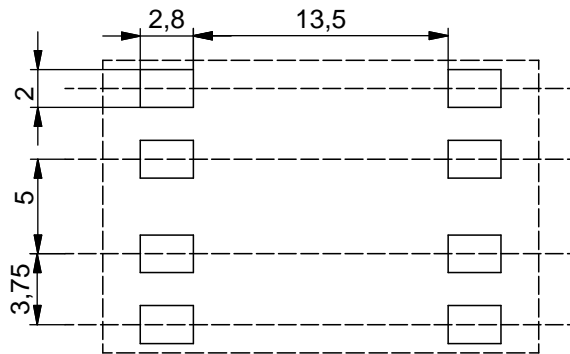


PROPOSED PAD ARRANGEMENT:

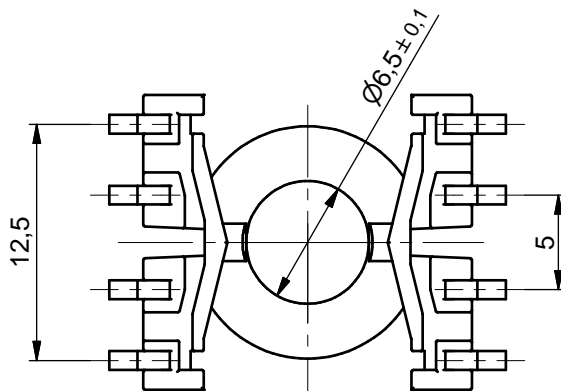

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 Pin material: UL file number: E54705(M) - UL94V-0
 CuSn6 -Ni, Sn plated
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 point 5 - method1 .
 Solderability: acc. to IEC 60 068-2-58 test method 6.1

Min. winding area: 6.4 mm .
 Mean length of turn: 31.4 mm.

CLASS.NO.	CPVS-RM6S/LP-1S-8P-B-C		432202107601		5		
					4		
					3		
					2		
					1	26-05-2015	
NAME M. Marszalek	SUPERS.	001	SH BL	SH BL	112 - 001	010	A4
DATE:		Property of	FERROXCUBE Polska Sp. z o.o.				