




Connectors System AC 164 Plug and Socket Connectors Tall Version

AC 164 BU/ 5 pastel blue

socket, 5 pole, pastel blue, coding: 2 (DALI), voltage rating: 240/400 V, current rating: 16 A, cross-section rating: 1.5 mm²

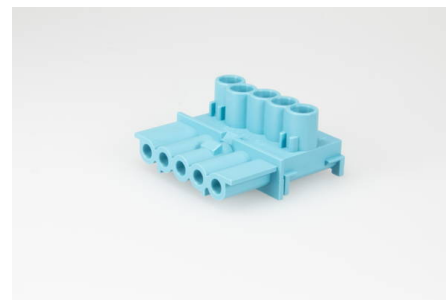

Order Info

reference number (ref. no.)	147025
PU	100
EAN	4028012122400

Type

type	socket
number of poles	5 pole
clamping units per pole	1
colour	pastel blue
coding	2 (DALI)
cross-section rating	1.5 mm ²
PE function	yes
protection against incorrect plugging	yes
latch	yes

Technical Data

voltage rating	240/400 V
current rating	16 A
insulating material	PA 6.6
contact material	brass
core cross-section min.	0.5 mm ²
core cross-section max.	1.5 mm ²
impulse voltage rating	4.0 kV
flammability rating	V-2
max. Ambient Temperature Operation	70 °C
IP code	IP20
IP code when plugged	IP40
type of conductor solid	yes
type of conductor flexible	yes
type of conductor stranded	yes
stripping length	7.0 mm
Assembly Contact Screw	PZ 1 / ⌀ 0.5 Nm

Approvals

acc. to EN 61535

[Download PDF](#)

acc. to UL

[Download PDF](#)
